


SURFACE COURSE
40mm SMA 10 SURF 40/60 TO BS EN 13108-5 STONE MASTIC ASPHALT. (TO BE LAID TO BS 594987)
ON
BINDER COURSE
60mm AC 20 HDM BIN 40/60 TO BS EN 13108-1 ASPHALT CONCRETE. (TO BE LAID TO BS 594987)
ON
BASE COURSE
150mm AC 32 HDM BASE 40/60 TO BS EN 13108-1 ASPHALT CONCRETE. REGULATING COURSE TO ACHIEVE LEVELS WHERE REQUIRED. (TO BE LAID TO BS 594987)

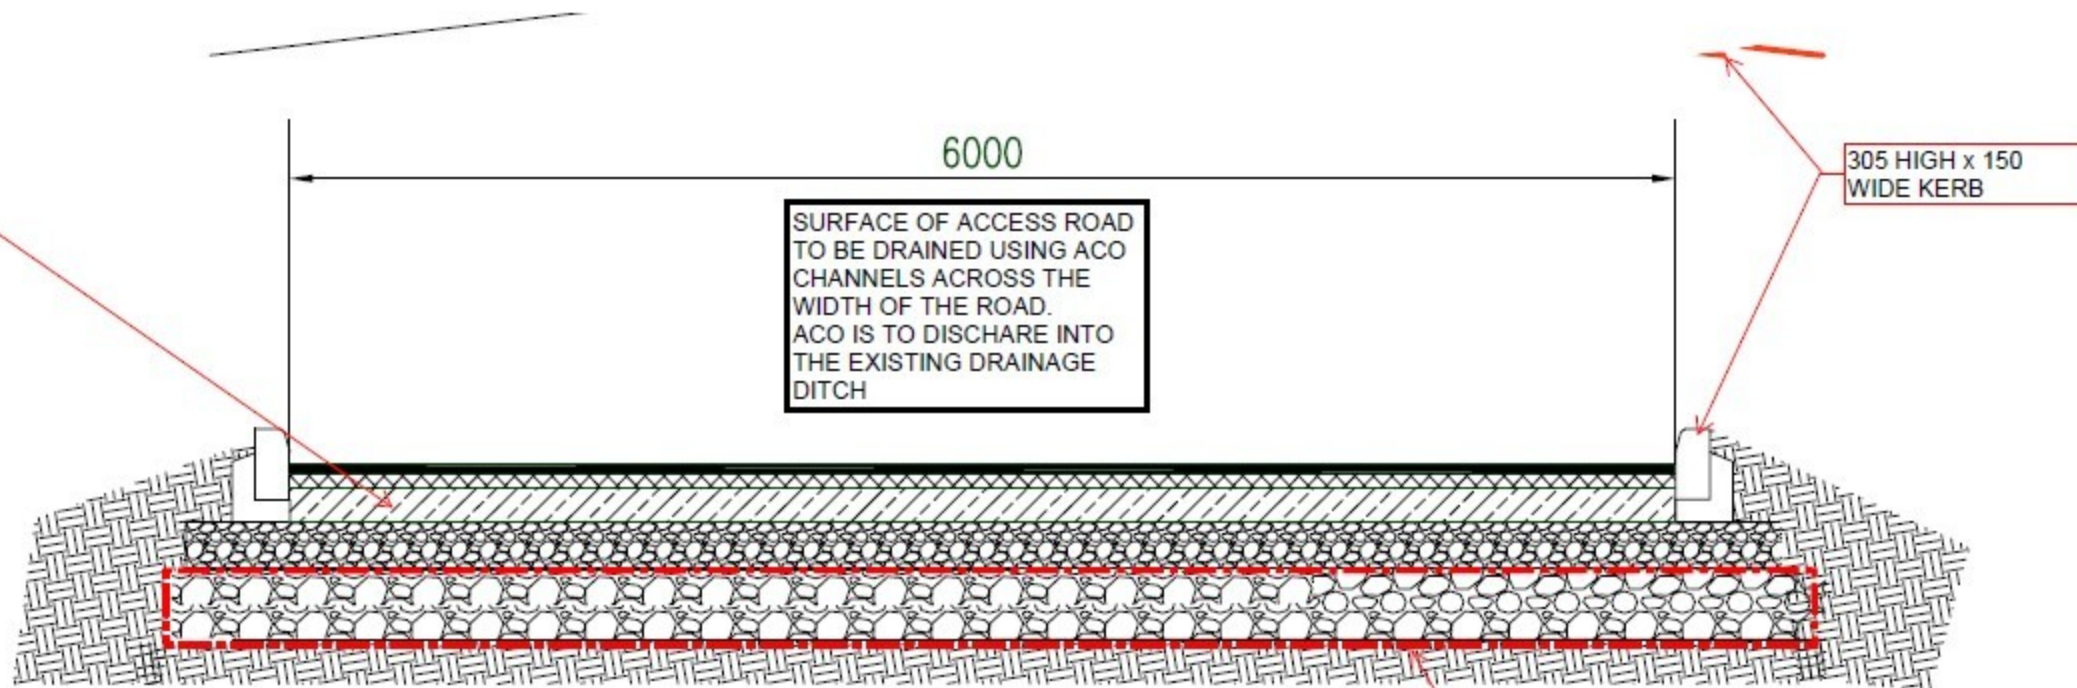

SUB-BASE
200mm THICK MOT TYPE 1 GRANULAR BACKFILL COMPACTED TO ACHIEVE A CBR OF 3
ON
GEOTEXTILE MATERIAL
ON
SUBGRADE
6F2 GRANULAR MATERIAL TO TABLE 6/1:(02/16) COMPACTED 150mm MAXIMUM THICK LAYERS COMPACTED WITH 6No PASSES USING 1800Kg - 2300Kg VIBRATING ROLLER.
ON
GEOTEXTILE MATERIAL
ON
FORMATION LEVEL
ENSURE ALL SOFT SPOTS ARE REMOVED AND PROOF ROLLED WITH 6No PASSES USING 1800Kg - 2300Kg VIBRATING ROLLER TO ACHIEVE A CBR OF 3